LEDITION

KOCH
Licht für Möbel und Objekte



With the kind support of the company Mintjens



Light Line surface-mounted LED profile luminaire

Product benefits

- Miniature linear luminaire
- Directed light by reflective surface
- Shadow-free furniture body illumination when used at the front of the body
- Directed light on the rear wall when vertically mounted at the back of the side walls
- Can be used with or without screw-on end caps
- Possible rear fastening with double-sided adhesive tape
- LED component density: preferably 90 LEDs/m (R111), other LED component densities possible
- LED light colours: warm white (3.200 Kelvin), neutral white (4.000 Kelvin), cold white (5.500 Kelvin)
- Housing colours: aluminium anodized EV1, painted stainless steel, black lacquered, other colours on request
- Length max. 3000 mm, width 10 mm, height 7.3 mm
- 2000 mm connection cable with LED-plug


Application

- Furniture lighting
- Object lighting

Only available on request. Please ask for your desired version.

Different Models

- Light Line warm white (3.200 Kelvin)
- Light Line neutral white (4.000 Kelvin)
- Light Line cold white (5.500 Kelvin)
- Ready-made luminaire to measure (length max. 3.000 mm),for surface-mounted version with or without end caps



Light Line LED profile luminaire without end caps

- Length max. 3000 mm
- Width 10 mm
- Height 7.3 mm



Light Line
LED profile luminaire

- With transparent screw-on plastic end caps for countersunk screws from 3 x 15 mm

Optional accessories




Light Line end caps


- Transparent
- Screwable for countersunk screws from 3 x 15 mm

Dimensional drawing

Light Line profile cross-section

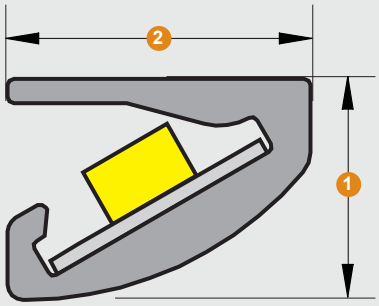

Light Line surface-mounted LED profile luminaire

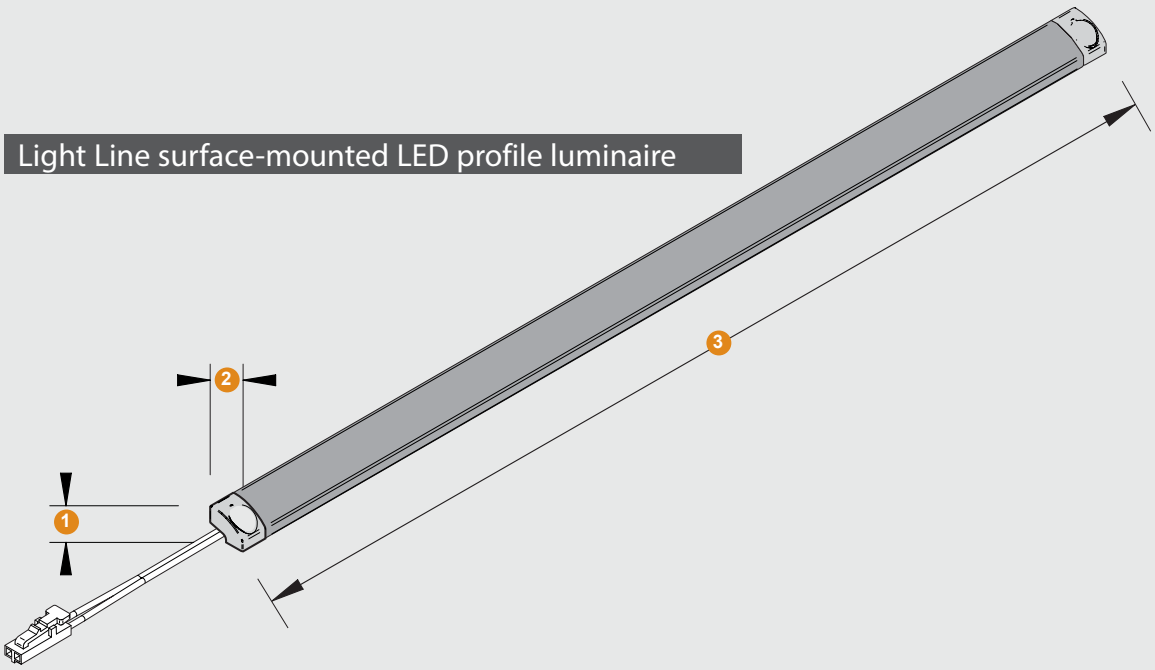

Dimensions

Description	Light Line LED surface-mounted profile luminaire (mm)
1. Profile height / groove depth	7.3
2. Profile width / groove width	10
3. Luminaire length incl. end caps	max. 3016


Technical details

Operating voltage:	12 Volt DC
Profile luminaire type:	surface-mounted LED profile luminaire
LED density:	preferably 90 LEDs/m (R111)
Surface:	aluminium anodised EV 1, stainless steel lacquered, black lacquered
Light colours:	warm white (3.200 Kelvin), neutral white (4.000 Kelvin), cold white (5.500 Kelvin)
Mounting:	using double-sided adhesive tape or clear screw-on plastic end caps
Supply lead:	2000 mm connection cable with LED-plug
Length:	max. 3000 mm (without end caps)
Width, height:	10 mm, 7.3 mm


Light distribution 120°

The specifications for light distribution are valid values at the date of issue.
Light Line, 90°: The values refer to a 1 m flex strip length R111.

warm white

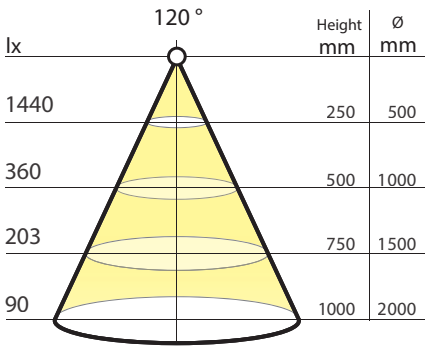

neutral white

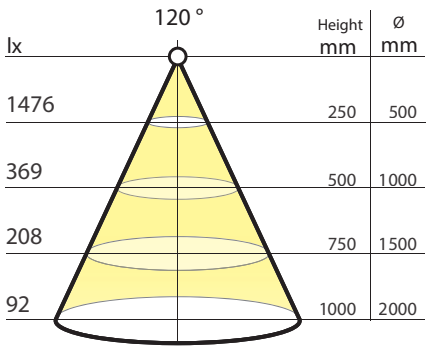

cold white

