LEDITION

KOCH
Licht für Möbel und Objekte



With the kind support of Wimmer Wohnkollektionen GmbH



Q Line Mini surface-mounted LED profile luminaire opal / clear

Product benefits

- Square luminaire profile
- Due to the opalization, despite the low profile dimensions with a LED density of 120 LEDs/m, an almost light point-free, homogeneous light emission can be realized
- Can be used for many different installation situations by using double-sided adhesive tape or transparent screw-on clips
- LED component density: 120 LEDs/m (R81 Mini = 3,5 mm width)
- LED light colours: warm white (3.000 Kelvin), warm white Low Wattage (ww/(LW) 3.000 Kelvin), cold white (5.000 Kelvin)
- Housing: transparent or opal plastic
- Form-fitting finish by end caps
- 2000 mm connection cable with LED-plug
- Length max. 3000 mm, width 6 mm, height 6 mm
- Optional transparent screw-on clips, for countersunk screws from 3 x 15 mm


Different models

- Q Line Mini warm white (3.000 Kelvin)
- Q Line Mini warm white Low Wattage (3.000 Kelvin)
- Q Line Mini cold white (5.000 Kelvin)
- Ready-made luminaire to measure (Length max. 3.000 mm), for surface-mounted version without end caps for exact body measurements

Application

- Furniture lighting
- Object lighting

Only available on request. Please ask for your desired version.



- Filigree profile dimension: 6 mm x 6 mm (width x height)




LED profile opal
with round end caps

Q Line Mini surface-mounted LED profile luminaire

- Mounting :
  - Using double-sided adhesive tape
- With screw-on clips for fastening with countersunk screws from 3x15 mm



LED profile clear
with square end caps




Optional accessories

Q Line Mini screw-on clips

- Transparent
- For countersunk screws from 3 x 15 mm

Dimensional drawing

Q Line Mini surface-mounted LED profile luminaire

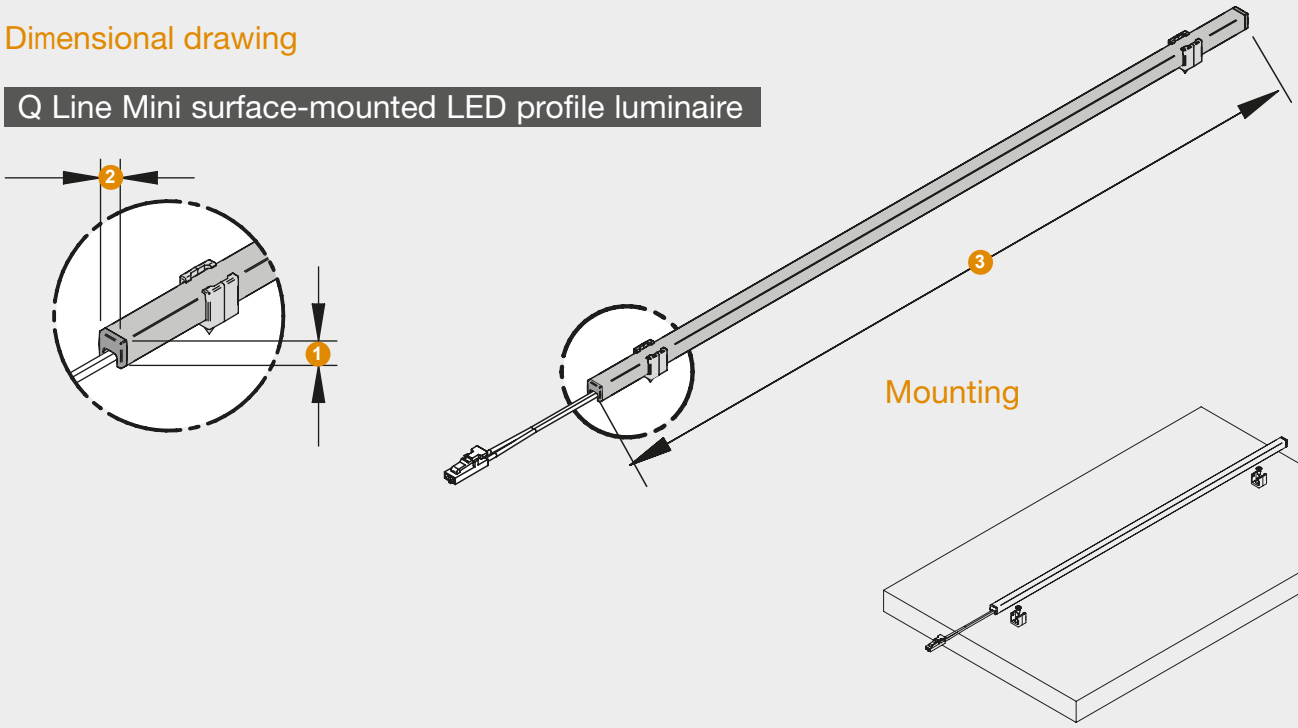

Mounting

Dimensions

Description	Q Line Mini surface-mounted LED profile luminaire (mm)
1. Profile height	6
2. Profile width	6
3. Luminaire length with end caps	max. 3000
4. Luminaire length without end caps	max. 2997


Technical details

Profile luminaire type:	surface-mounted LED profile luminaire
LED density:	120 LEDs/m (R81 Mini)
Surface:	opal / transparent plastic
Light colours:	warm white (3.000 Kelvin), warm white Low Wattage (ww/(LW): 3.000 Kelvin), cold white (5.000 Kelvin)
Mounting :	using double-sided adhesive tape; with transparent screw-on clips for fastening with countersunk screws from 3 x 15 mm
Supply lead:	2000 mm connection cable with LED-plug
Length:	max. 3000 mm
Width, height	6 mm


Light distribution 120°

The specifications for light distribution are valid values at the date of issue.
Q Line Mini: The values refer to a 1 m flex strip length Q Line Mini R81.


Q Line Mini opal, warm white




Q Line Mini opal, ww (LW)




Q Line Mini opal, cold white



Q Line Mini clear, warm white



Q Line Mini clear, ww (LW)



Q Line Mini clear, cold white

